

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 December 2004 (29.12.2004)


PCT

(10) International Publication Number  
**WO 2004/114547 A1**

- (51) International Patent Classification<sup>7</sup>: **H04B 7/185**
- (21) International Application Number:  
PCT/NL2003/000463
- (22) International Filing Date: 23 June 2003 (23.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): STICHTING ASTRON [NL/NL]; Oude Hoogeveensedijk 4, NL-7991 PD Dwingeloo (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KEGEL, Jacobus, Adrianus [NL/NL]; De Tellinghorst 11, NL-7909 CG HOOGEVEEN (NL).
- (74) Agent: PRINS, A.W.; NIEUWE PARKLAAN 97, NL-2587 BN DEN HAAG (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR OPTIMISING AT LEAST ONE PROPERTY OF A SATELLITE SYSTEM, OPTIMISATION DEVICE FOR A SATELLITE SYSTEM, SATELLITE RECEIVER AND SATELLITE SYSTEM

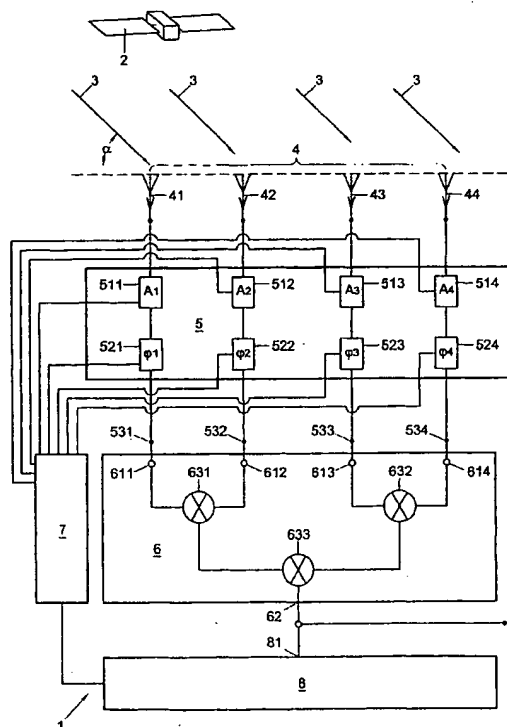

(57) Abstract: A method for optimising at least one property of a satellite system. The satellite system comprises a satellite provided with a transmitter for transmitting an satellite signal which represents data. The satellite is further provided with a satellite receiver for receiving said satellite signal. The method comprises receiving at said satellite receiver the satellite signal; determining from the satellite signal said data; checking the data for data errors; and changing said at least one property of the satellite system if a result of said checking satisfies a predetermined criterion.

WO 2004/114547 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*